
Clean Large Tube Bundles Four Times Faster

THE RAM-5DC IS THE #1 CHOICE FOR CONTRACTORS AND FACILITY MANAGERS.

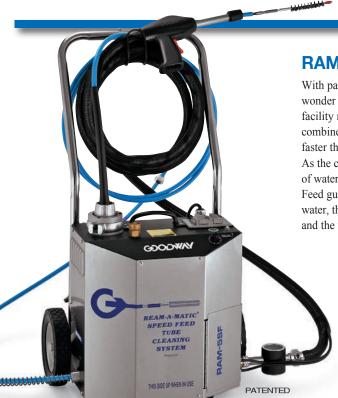

RAM-5DC - Revolutionary Speed

With patented technology and over 15 years of proven performance, it's no wonder why the RAM-5DC is the machine of choice among contractors and facility managers with large tube bundles. The revolutionary Speed Feed gun combined with Goodway Blue Nylon Brushes will clean tubes up to four times faster than any other rotary tube cleaner. Minimal training time is required. As the cleaning tool loosens debris, the shaft casing provides a steady stream of water, flushing out debris and restoring system efficiency. While the Speed Feed gun lets you control the direction of shaft rotation as well as the flow of water, the variable speed function allows you to control both the brush rpm and the feed rate.

RAM-5DC-60

Speed-Feed Tube Cleaner, including speed-feed gun, 15' guide hose, one set of shaft feeder gears (specify size), mobile dolly, tool storage box and two-direction foot switch

Note: See pages 32-37 and 46-49 for shafts and accessories.

FEATURES

- > Adjustable shaft auto feed
- > Stainless steel construction
- Speed control to set auto feed and shaft rotation at optimum speed for each application
- > Chain Drive
- > Quick connect threadless shaft manifold
- > Interchangeable cleaning tools
- > Integrated dolly
- > Simultaneous water flush
- > Trigger controlled or foot switch activation
- > Reversible shaft rotation

Specification	RAM-5DC
Motor Power	0.75 HP
Input Power	Standard: 12 amps, 115 V, 60 Hz AC Optional: 12 amps, 115 V, 50 Hz; 6 amps, 230 V, 60 Hz; or 6 amps, 230 V, 50 Hz
Power Supply Cord	21', 14-3 GFCI
Flexible Shaft Speed	Adjustable, 200-862.5 rpm
Speed-Feed Gun Rate	Adjustable, 0.7'-3' per second
Speed-Feed Gun Force	50 lbs, push/pull
Water Requirements	Minimum 30 PSI at 2 GPM
Dimensions (Excluding Gun and Guide Hose)	37" high x 20" wide x 17" deep
Weight	75 lbs net dry

Optional:

834R-SF

Two-Direction Foot Switch for cleaning internally enhanced tubes

FG-702

Speed-Feed Gears for GTC-702 Shaft

SFG-703

Speed-Feed Gears for GTC-703 Shaft

SFG-704

Speed-Feed Gears for GTC-704 Shaft

2248-36

Extension Guide Tube

with sliding handle for Speed-Feed gun, 36" long

Contractor Dolly:

The durable, ergonomic dolly with storage rack and accessory bin makes the RAM-5SFVS easy to transport

RAM-DOLLY-C

Heavy-Duty Contractor Dolly (upgrade)*

*Note: When not ordered as an upgrade with a machine, the RAM-DOLLY-C is \$295.00.



TWO-DIRECTION FOOT SWITCH

RAM-DOLLY-C



Call Us With Your Dirt: 1-800-333-7467

Goodway Technologies Corporation

420 West Avenue, Stamford, CT 06902-6384 U.S.A. T: 203-359-4708 • F: 203-359-9601 • E: goodway@goodway.com www.goodway.com



RAM-5DC Service Kit:

The RAM-5DC Speed Feed Tube Cleaner is a hard working machine but after thousands of tubes it could probably use a break. Here's a service kit to get your machine back up to speed. The kit has everything from illustrated instructions, shaft/driver, O-ring, seal, snap ring and bearings to a new set of Speed Feed gears, and even replacement parts for the Speed Feed gun.

R5-SVC-KIT-3 RAM-5DC Service Kit including, 805 O-ring, 824 Seal, 825-R5 Bearings (package of ten), 826 Snap Ring, 833-1 Lower Bearing, 2229 Shaft/Driver, 803 Screen Washer, SFG-703 Speed Feed Gears, 2224 Trigger, 2225 Trigger Pads (package of two), 2245 Trigger Pin and HWST-1037-P Cover Screws (package of six)







BLUE NYLON BRUSH

Speed-Feed Chiller Tube Cleaning System:

This is our most commonly used package for cleaning chiller tubes with speed-feed technology. It has everything you need for cleaner, more efficient chiller performance. R5SFVS-450

Speed-Feed Chiller Tube Cleaning System with quick connect fittings

- 1 RAM-5DC-60 Ream-A-Matic Tube Cleaner
- 2 GTC-703Q-45-R5 Flexible Shafts
- 1 9401 Chiller Bib Bag
- 1 9402 Chiller Bib Frame
- 25 GTC-211Q Blue Nylon Brushes (specify size)
- 1 REP-703Q-KIT Repair Kit for GTC-703Q Flexible Shafts



R5SFVS-45

Same as R5SFVS-45Q except with threaded fitting

